수정 내용			
수정	설명	날짜	승인

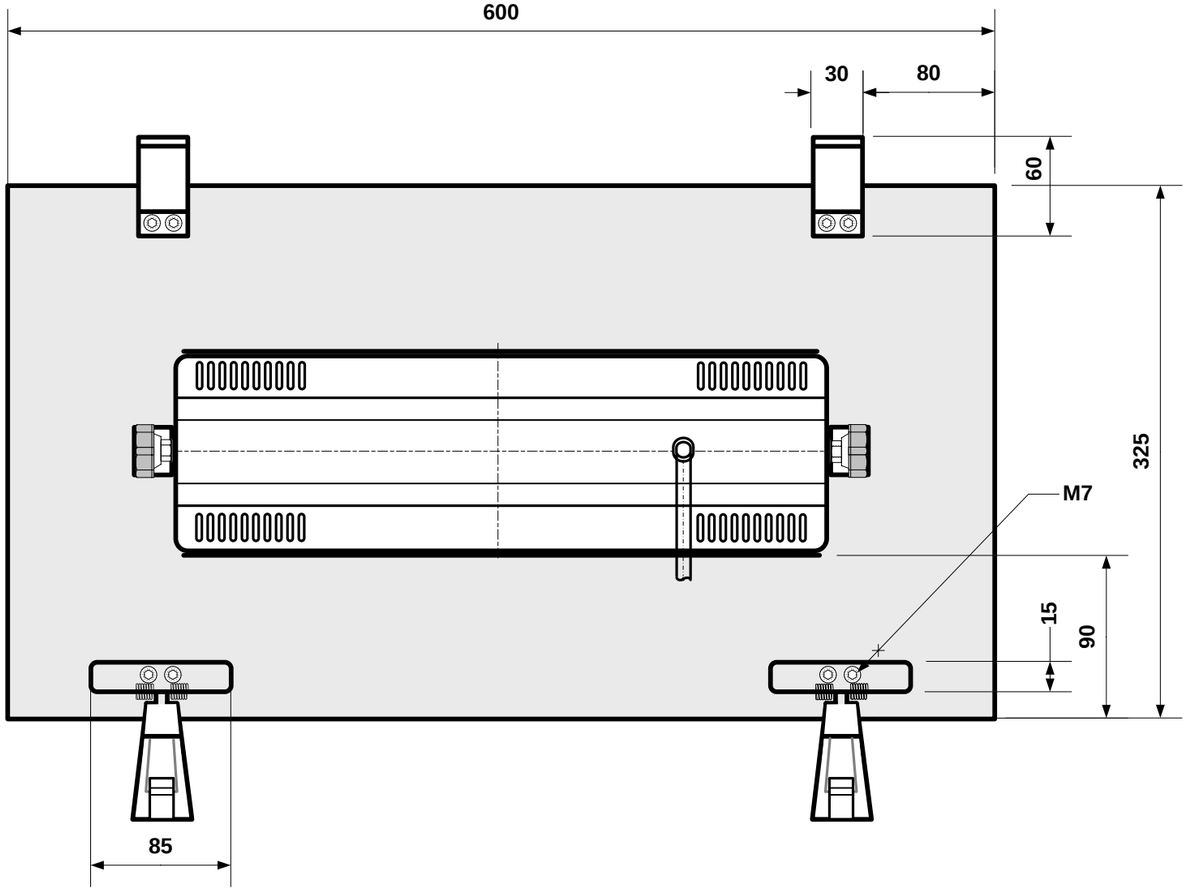

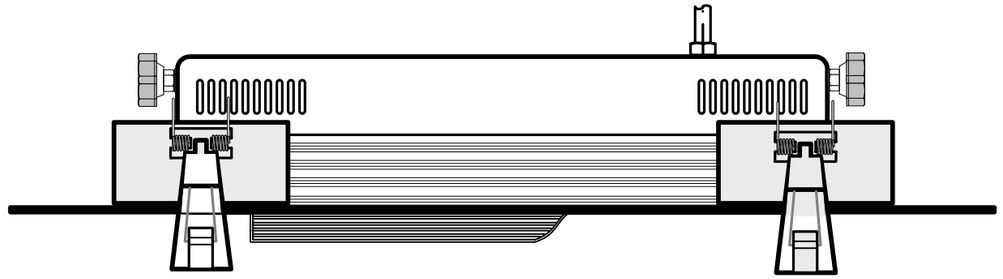

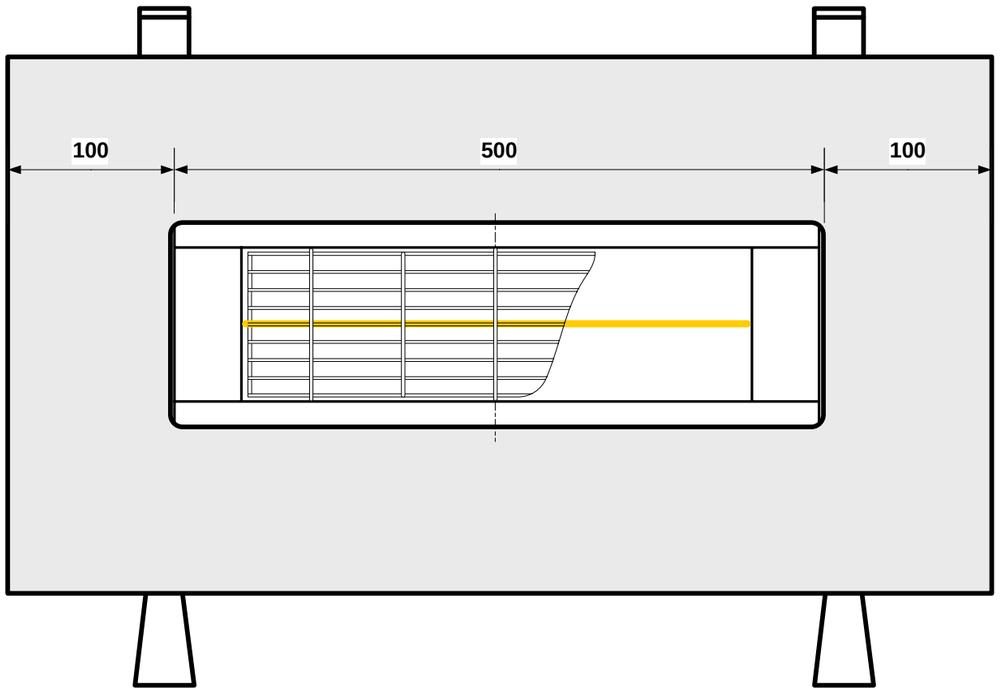

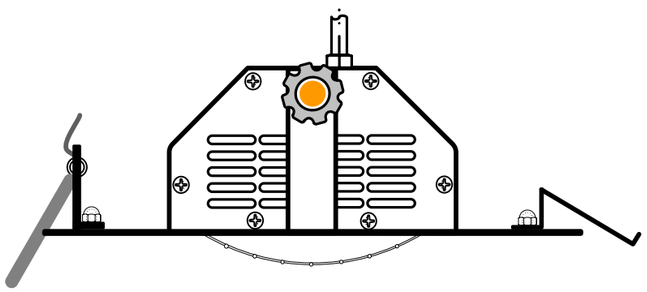

SPEC
1) Voltage : 230~240V
2) Wattage : 2000W
3) Lamp Color Temperature (Coated) : 1600 ± 200K
4) Total Weight : 8Kg

WORKING CONDITION
1) Burning Position : Within Horizontal ±5°
2) Burning Cycle : Continuous or Intermittent
3) Burning Voltage : 230~240V ± 10%
4) Frequency : 50/60 Hz

LIFE
1) Life time : 5,000 hour (Normal Condition)

NO	ITEM	MATERIAL	Q`TY	SPEC
1	Body	Aluminum	1	t=2.0
2	Bracket	SPCC	1	t=2.0
3	Lamp	Quartz	1	230V 2000W
4	Refector	Aluminum	1	T=0.5
5	Safety grill	SS	1	Φ 1.55 Cr Plating
6	Cable socket	Plug type	1	230V 16A 1.5㎟(3m) H07RN-F, H05VV-F
7	Fix prop	SPCC	1	t=3.0

TITLE : SMART BH 2000-F

THIRD ANGLE PROJECTION | UNIT : mm | SCALE : FREE

DRAWN	DESIGNED	CHECKED	APPROVED

HANA HALOGEN CO.,LTD

NO	DESCRIPTION	MAT`L	FINISH	Q`TY	REMARK

도면등록 NO
HAD-AQ-142

품번

개정차수
0

도면에 지정되지 않은 일반공차

C급	B급	A급	급수
±0.05	±0.10	±0.05	1~4 mm 미만
±0.35	±0.20	±0.07	4~16
±0.50	±0.30	±0.10	16~23
±0.90	±0.55	±0.16	63~250
±1.50	±0.90	±0.30	250~500
±2.50	±1.50	±0.50	500~1000